

Bellows suction cups (round)

FSGC 40 NBR-55 G1/4-AG

Part no.:10.01.06.04870

<https://www.schmalz.ru/10.01.06.04870>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Bellows Suction Cups (Round) > Bellows Suction Cups FSGC > FSGC 40 NBR-55 G1/4-AG

Bellow suction cup (round) for logistics applications for handling a wide range of workpieces



Size: 40

Suction cup material: Nitrile rubber NBR


Material hardness [Shore A]: 55 Shore A

Nipple material: Aluminum

Vacuum connection: G1/4"-M

Number of folds: 4.5

Design Data

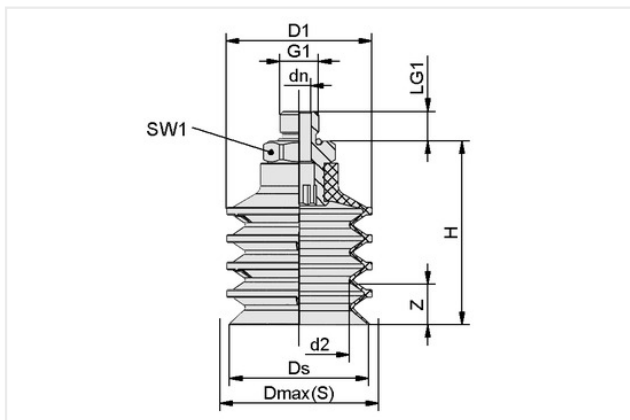

Attribute	Value
Z (Stroke)	25 mm
H	54.50 mm
Vacuum connection	G1/4"-M
D1	39 mm
d2	27.50 mm
Ds	39 mm
Dmax(S)	41 mm
dn	8 mm
G1	G1/4"-M
G1	G1/4-AG
LG1	10 mm
SW1	22 mm

Technical Data

Attribute	Value
Number of folds	4.50
Size	40
Suction cup material	Nitrile rubber NBR
Suction force (-600mbar)	35 N
Product family	FSGC
Material hardness [Shore A]	55 Shore A

Contact Schmalz

OOO Schmalz | Mozhayskoe highway 165, bldg1, 121596 Moscow, Russia | +7 495 9671248 | post@ruschmalz.ru

Bellows suction cups (round)

FSGC 40 NBR-55 G1/4-AG

Part no.:10.01.06.04870

<https://www.schmalz.ru/10.01.06.04870>

Nipple material	Aluminum
Pull-off force (real)	37 N
Volume	29.10 cm ³
Hose diameter (rec.) d	9 mm

Spare parts



FGC 40 NBR-55 SC080

Part no.:10.01.06.04863

Size: 40

Suction cup material: Nitrile rubber NBR

Material hardness [Shore A]: 55 Shore A

Nipple family: SC080

Number of folds: 4.5



SC 080 G1/4-AG

Part no.:10.01.06.03268

Connection geometry: 080

Vacuum connection: G1/4"-M

Length L1: 32 mm

Fitting length: 7.5 mm

Nominal diameter dn: 8 mm