

Ejector module MATCH

RECBi 24V-DC NO PXR-X 2C MATCH

Part no...:10.02.03.00407

<https://www.schmalz.ru/10.02.03.00407>

Home > Vacuum Technology for Robotics > End-of-Arm Ecosystem MATCH > Pneumatic Vacuum Generators RECBi MATCH > RECBi 24V-DC NO PXR-X 2C MATCH

Pneumatic Vacuum Generator for End-of-Arm Ecosystem MATCH



Voltage DC: 24V - DC


Control valve: Normally open

Add. function: PXR (X-shape)

Use: IO-Link

Construction: Quick-change system MATCH

Design Data

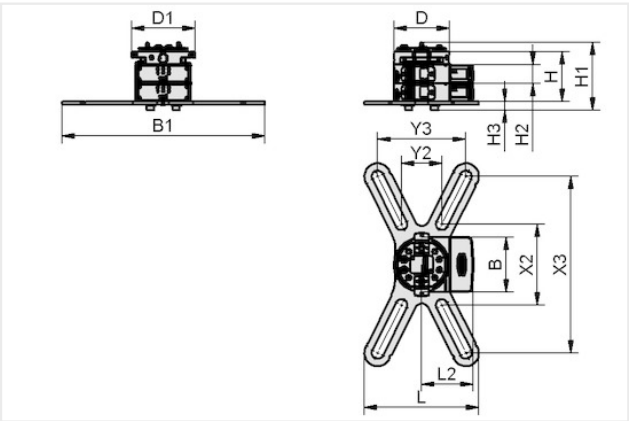

Attribute	Value
B	75 mm
B1	276 mm
D	75.50 mm
D1	86.20 mm
H	68 mm
H1	92.50 mm
H2	25 mm
H3	12 mm
L	156 mm
L2	70 mm
X2	110 mm
X3	240 mm
Y2	55 mm
Y3	120 mm

Technical Data

Attribute	Value
Add. function	PXR (X-shape)
Voltage DC	24V - DC
Suction rate (max.)	52.50 l/min
Max. vacuum	850 mbar

Contact Schmalz

OOO Schmalz | Mozhayskoe highway 165, bldg1, 121596 Moscow, Russia | +7 495 9671248 | post@ruschmalz.ru

Ejector module MATCH

RECBi 24V-DC NO PXR-X 2C MATCH

Part no.:10.02.03.00407

<https://www.schmalz.ru/10.02.03.00407>

Control valve	Normally open
Rated power	3 W
Voltage	24V - DC
Rated current	0.10 A
Pressure range (operating pressure)	3.00 ... 7.00 bar
Operating temperature	0 ... 50 °C

Accessories



ZUB RECBi-PXRX

Part no.:10.02.03.00414

Pressure range (operating pressure): bar



VENT-BGR EMVP-5 3/2 NC 24V-DC

Part no.:10.08.09.00032

Voltage DC: 24V - DC

Pressure range (operating pressure): -0.9 ... 8.0 bar

Control valve: Normally closed

Nominal size: 5 mm

Nominal flow rate: 3 m³/h

Type: RECB

Ejector module MATCH

RECBi 24V-DC NO PXR-X 2C MATCH

Part no...:10.02.03.00407

<https://www.schmalz.ru/10.02.03.00407>



STATION 150x110x22 MATCH

Part no...:10.08.09.00013

Length L: 150 mm

Width B: 110 mm

Height H: 22 mm

Construction: Quick-change system MATCH



SD 66.7x24.4x24.5 RECBi

Part no...:10.02.03.00441

Construction use: Pneumatic vacuum generators RECBi

Length L: 66.7 mm

Width B: 24.4 mm

Height H: 24.5 mm

Spare parts



ERS RECB SD

Part no...:10.02.03.00422

Construction use: Pneumatic vacuum generator RECB

Operating temperature: °C

Pressure range (operating pressure): bar

contains: Silencer

and: Screws

Ejector module MATCH

RECBi 24V-DC NO PXR-X 2C MATCH

Part no...:10.02.03.00407

<https://www.schmalz.ru/10.02.03.00407>



ERS SEP-13 6xRUE-KLAP

Part no...:10.02.01.01449

Construction use: Ejector module

Size: 13

contains: 6x flap



SEP HV 2 14 13 S

Part no...:10.02.01.01493

Suction rate (max.): 65.8 l/min

Operating temperature: 0 ... 60 °C

Shape: High Vacuum

Number of stages: 2

Nozzle size: 1.4 mm

Hole diameter: 13 mm

construction shape compact ejectors: S

Degree of evacuation: 85 %

Pressure range (operating pressure): 2.0 ... 6.0 bar

Pressure optimal: 4 bar



SPB1 30 ED-65 G1/4-AG

Part no...:10.01.06.04530

Size: 30

Suction cup material: Elastodur ED

Material hardness [Shore A]: 65 Shore A

Thread G1: G1/4"-M

Number of folds: 1.5