

## Hose sleeve

ST G3/4-AG 19 MS-V

Part no.:10.08.03.00165

<https://www.schmalz.ru/10.08.03.00165>

Home > Accessories for Screw Unions > ST G3/4-AG 19 MS-V

### Hose sleeve



Thread G1: G3/4"-M

Hose diameter (rec.) d: 19 mm


Material: Brass

Surface: nickel plated

Length L: 7.8 mm

Nominal diameter dn: 16 mm

### Design Data

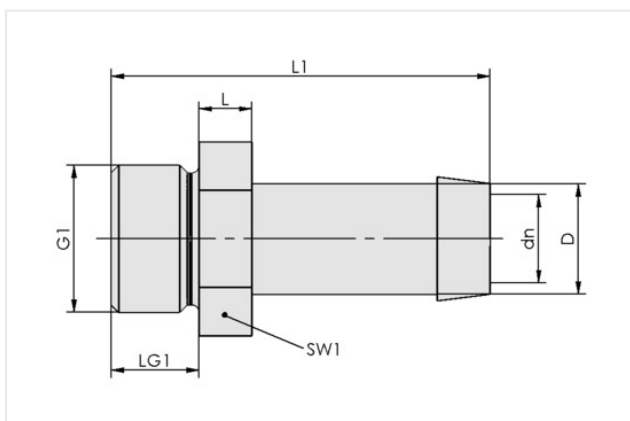

| Attribute | Value    |
|-----------|----------|
| dn        | 16 mm    |
| D         | 19 mm    |
| G1        | G3/4"-M  |
| L         | 7.80 mm  |
| L1        | 60 mm    |
| LG1       | 15.80 mm |
| SW1       | 32 mm    |

### Technical Data

| Attribute | Value |
|-----------|-------|
| Material  | Brass |
| Weight    | 116 g |

### Accessories

#### Contact Schmalz

OOO Schmalz | Mozhayskoe highway 165, bdg1, 121596 Moscow, Russia | +7 495 9671248 | [post@ruschmalz.ru](mailto:post@ruschmalz.ru)

## Hose sleeve

ST G3/4-AG 19 MS-V

Part no...:10.08.03.00165

<https://www.schmalz.ru/10.08.03.00165>



### VSL 26-19 PVC-DS KL-TR

Part no...:10.07.09.00007

External diameter D: 26 mm

Internal diameter d: 19 mm

Length max.: 50 m

Material hose: PVC with wire spiral

Bending radius min.: 85 mm

Pressure range (operating pressure): -0.90 ... 5.00 bar

Operating temperature: -15 ... 65 °C