

Feed ejector

SEC-200 A2

Part no.:10.02.01.01326

<https://www.schmalz.ru/10.02.01.01326>

Home > Vacuum Technology for Automation > Vacuum Components > Special Grippers > Feed Ejectors > Feed Ejectors SEC > SEC-200 A2

Powerful ejector for very porous parts




Nozzle size: 20 mm

Suction rate (max.): 82.5 m³/h

Material: Aust. Stainless steel

Design Data

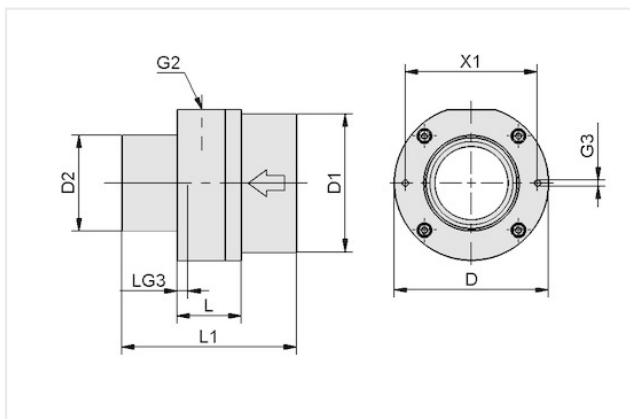

Attribute	Value
D	50 mm
D1	38 mm
D2	32 mm
G2	G1/4"-F
G3	M4-F
L	30 mm
L1	90 mm
LG3	12 mm
X1	42 mm

Technical Data

Attribute	Value
Max. vacuum	-60 mbar
Suction rate (max.)	1370 l/min
Suction rate (max.)	82.50 m ³ /h
Air consumption suction	290 l/min
Air consumption suction	17.40 m ³ /h
Pressure range (operating pressure)	2.0 ... 6.0 bar
Operating temperature	°C
Material	Aust. Stainless steel
Weight	0.51 kg

Contact Schmalz

OOO Schmalz | Mozhayskoe highway 165, bldg1, 121596 Moscow, Russia | +7 495 9671248 | post@ruschmalz.ru

Feed ejector

SEC-200 A2

Part no...:10.02.01.01326

<https://www.schmalz.ru/10.02.01.01326>

Max. vacuum	-1.77 inHg
Suction rate (max.)	48.38 cfm
Air consumption suction	10.24 cfm
Pressure range (operating pressure)	29.0 ... 87.0
Product family	SEC

Note: Air consumption: At optimal operating pressure (4,5 bar)