

Vacuum pump

EVE-TR-X 25 AC3 F-VB

Part no.:10.03.01.00216

<https://www.schmalz.ru/10.03.01.00216>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Generators > Vacuum Pumps > Dry-Running Vacuum Pumps EVE-TR X > EVE-TR-X 25 AC3 F-VB

Oil-free pump with const. suct. rate robust, requ. little maintenance long service life, cont. operation



Current type: three-phase current

Voltage at 50Hz: 190-242V/342-440V AC3

Voltage at 60Hz: 190-265V/342-500V AC3

Suction rate (50 Hz): 25 m³/h

Suction rate (60 Hz): 30 m³/h

Sound level at 50 Hz: 62 dB(A)

Vacuum (50 Hz): -900 mbar


Vacuum (60 Hz): -900 mbar

Rated power 50 Hz: 0.75 kW

Rated power 60 Hz: 0.9 kW

Weight: 26.5 kg

Design Data

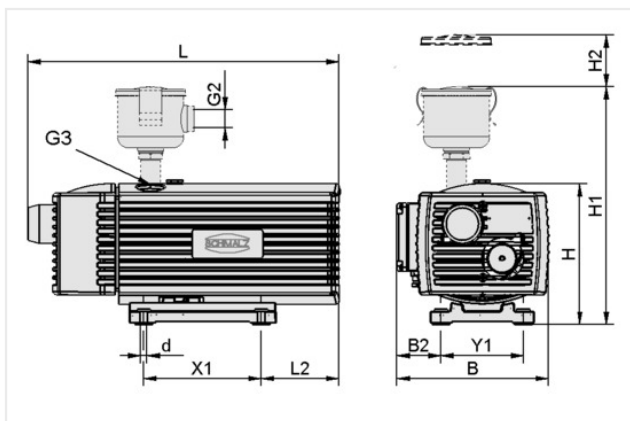

Attribute	Value
B	260 mm
B2	40 mm
d	7 mm
G2	G3/4"-F
G3	G3/4"-F
H	290 mm
H1	380 mm
H2	70 mm
L	505 mm
L2	96 mm
X1	220 mm
Y1	190 mm

Technical Data

Attribute	Value
Suction rate (50 Hz)	25 m ³ /h
Suction rate (60 Hz)	30 m ³ /h
Voltage at 50Hz	190-242V/342-440V AC3
Voltage at 60Hz	190-265V/342-500V AC3

Contact Schmalz

OOO Schmalz | Mozhayskoe highway 165, bldg1, 121596 Moscow, Russia | +7 495 9671248 | post@ruschmalz.ru

Vacuum pump

EVE-TR-X 25 AC3 F-VB

Part no.:10.03.01.00216

<https://www.schmalz.ru/10.03.01.00216>

Rated power 50 Hz	0.75 kW
Rated power 60 Hz	0.90 kW
Sound level at 50 Hz	62 dB(A)
Weight	26.50 kg
Protection type IP	IP 54
Current type	AC3
Product family	EVE-TR-X

Noise level according to DIN EN ISO 3744 (uncertainty factor KpA = 3 dB(A)), interval of 1 m, at medium load, both connection sides piped

Spare parts



VST EVE-TR-X-25

Part no.:10.03.01.00225

Construction use: Pump EVE-TR-X

Size: 25

contains: Brush slide/Filter



FILT-EINS EVE-TR-X-25/40

Part no.:10.03.01.00230

Construction use: Pump EVE-TR-X

Size: 25/40

Contact Schmalz

OOO Schmalz | Mozhayskoe highway 165, bldg1, 121596 Moscow, Russia | +7 495 9671248 | post@ruschmalz.ru