

## Bellows suction cups (round)

FSG 52 HT1-60 G1/4-IG

Part no.:10.01.06.02388

<https://www.schmalz.ru/10.01.06.02388>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Bellows Suction Cups (Round) > Bellows Suction Cups FSG (2.5 Folds) > FSG 52 HT1-60 G1/4-IG

### Bellows suction cup (round) for very uneven workpieces



Size: 52

Suction cup material: High temperature material HT1


Material hardness [Shore A]: 60 Shore A

Connection: G1/4"-F

Number of folds: 2.5

Vacuum connection: G1/4"-F

### Design Data

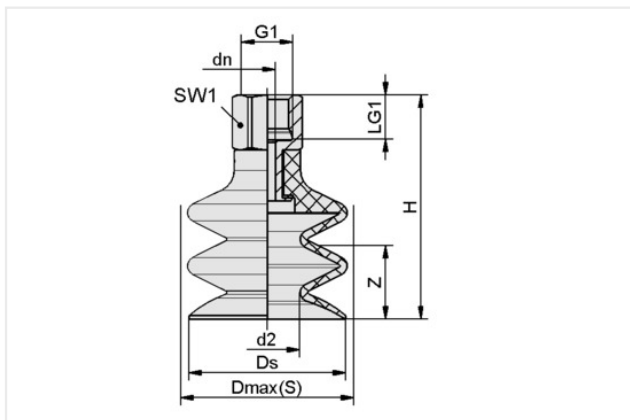

| Attribute  | Value    |
|------------|----------|
| d2         | 24.60 mm |
| dn         | 4.40 mm  |
| Dmax(S)    | 55 mm    |
| Ds         | 52.50 mm |
| G1         | G1/4"-F  |
| H          | 63.70 mm |
| LG1        | 12 mm    |
| SW1        | 17 mm    |
| Z (Stroke) | 25 mm    |

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

### Technical Data

| Attribute                   | Value                         |
|-----------------------------|-------------------------------|
| Suction cup material        | High temperature material HT1 |
| Material hardness [Shore A] | 60 Shore A                    |
| Size                        | 52                            |
| Number of folds             | 2.50                          |
| Connection                  | G1/4-IG                       |
| Curve radius (min) (convex) | 75 mm                         |
| Volume                      | 35 cm <sup>3</sup>            |

### Contact Schmalz

OOO Schmalz | Mozhayskoe highway 165, bldg1, 121596 Moscow, Russia | +7 495 9671248 | [post@ruschmalz.ru](mailto:post@ruschmalz.ru)

## Bellows suction cups (round)

FSG 52 HT1-60 G1/4-IG

Part no.:10.01.06.02388

<https://www.schmalz.ru/10.01.06.02388>

|                          |         |
|--------------------------|---------|
| Suction force (-600mbar) | 28.52 N |
| Pull-off force           | 96 N    |
| Hose diameter (rec.) d   | 6 mm    |
| Weight                   | 32.30 g |
| Product family           | FSG     |

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface - they do not include a safety factor Pull-off force: The pull-off force of the versions made of natural rubber is reduced by about 40% Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

### Accessories



#### DR 52/33x5 MOS SI-15

Part no.:10.01.06.02548

External diameter D: 52 mm

Internal diameter d: 33 mm

Height H: 5 mm

Material type: Foam rubber

Sealing material: Silicone SI

Material hardness [Shore A]: 15 Shore A



#### FD 44 120

Part no.:10.01.06.02573

External diameter D: 44 mm

Filter pore size: 120 µm

Construction use: Bellows suction cup

Size: FG 52

## Bellows suction cups (round)

FSG 52 HT1-60 G1/4-IG

Part no...:10.01.06.02388

<https://www.schmalz.ru/10.01.06.02388>



### SU 50

Part no...:10.01.01.12837

Size: 50

Clamping range: 45.0 ... 60.0 mm

Temperature resistance: 80 °C

## Spare parts



### SA-NIP N018 G1/4-IG DN440

Part no...:10.01.06.01066

Nipple family: N 018

Thread G1: G1/4"-F


Length L1: 28.8 mm

Fitting length: 15 mm

Nominal diameter dn: 4.4 mm

Spanner size SW2: 5 mm

Material: Aluminum

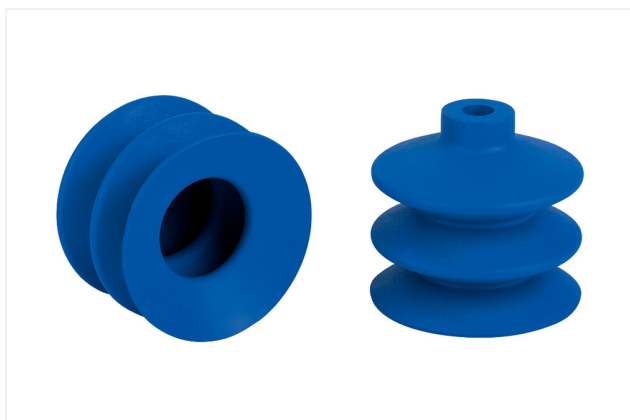

### FG 52 HT1-60 N018

Part no...:10.01.06.02365

Size: 52

Suction cup material: High temperature material HT1

Material hardness [Shore A]: 60 Shore A

Number of folds: 2.5