

## Bellows suction cups (round)

FSGA 43 SI-55 G1/4-AG

Part no.:10.01.06.00092

<https://www.schmalz.ru/10.01.06.00092>

Home > Bellows Suction Cups FSGA (1.5 Folds) > FSGA 43 SI-55 G1/4-AG

### Bellows suction cup (round) with optimal adaptation to uneven surfaces



Size: 43

Suction cup material: Silicone SI

Material hardness [Shore A]: 55 Shore A

Material characteristics: FDA-compatible


Nipple material: Aluminum

Connection: G1/4"-M

Number of folds: 1.5

Vacuum connection: G1/4"-M

### Design Data

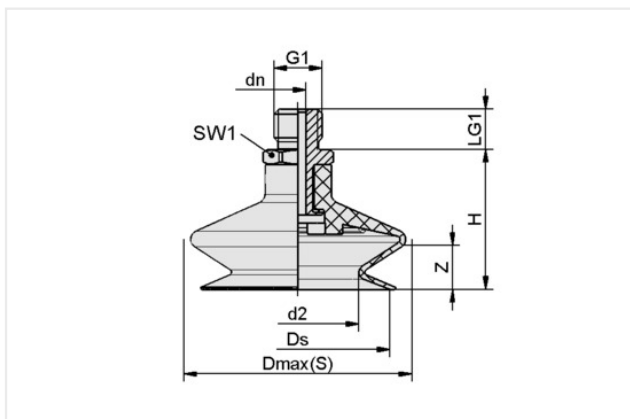

| Attribute  | Value    |
|------------|----------|
| d2         | 21.90 mm |
| Dmax(S)    | 47.50 mm |
| dn         | 4.40 mm  |
| Ds         | 38 mm    |
| G1         | G1/4"-M  |
| H          | 31.60 mm |
| LG1        | 11 mm    |
| SW1        | 17 mm    |
| Z (Stroke) | 10 mm    |

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

### Technical Data

| Attribute                   | Value                |
|-----------------------------|----------------------|
| Suction cup material        | Silicone SI          |
| Material hardness [Shore A] | 55 Shore A           |
| Size                        | 43                   |
| Number of folds             | 1.50                 |
| Connection                  | G1/4-AG              |
| Curve radius (min) (convex) | 60 mm                |
| Volume                      | 9.25 cm <sup>3</sup> |
| Suction force (-600mbar)    | 22.80 N              |

### Contact Schmalz

OOO Schmalz | Mozhayskoe highway 165, bldg1, 121596 Moscow, Russia | +7 495 9671248 | [post@ruschmalz.ru](mailto:post@ruschmalz.ru)

## Bellows suction cups (round)

FSGA 43 SI-55 G1/4-AG

Part no...:10.01.06.00092

<https://www.schmalz.ru/10.01.06.00092>

|                        |         |
|------------------------|---------|
| Pull-off force         | 64.50 N |
| Hose diameter (rec.) d | 6 mm    |
| Weight                 | 19 g    |
| Product family         | FSGA    |

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface - they do not include a safety factor Pull-off force: The pull-off force of the versions made of natural rubber is reduced by about 40% Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

### Spare parts



#### SA-NIP N018 G1/4-AG DN440

Part no...:10.01.06.01065

Nipple family: N 018

Thread G1: G1/4"-M

Length L1: 28.8 mm

Fitting length: 4 mm

Nominal diameter dn: 4.4 mm

Spanner size SW2: 5 mm

Material: Aluminum



#### FGA 43 SI-55 N018

Part no...:10.01.06.00127

Size: 43

Suction cup material: Silicone SI

Material hardness [Shore A]: 55 Shore A

Material characteristics: FDA-compatible

Number of folds: 1.5