

Bellows suction cups (round)

FSGA 22 NBR-ESD-55 M5-AG

Part no.:10.01.06.04482

<https://www.schmalz.ru/10.01.06.04482>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Bellows Suction Cups (Round) > Bellows Suction Cups FSGA (1.5 Folds) > FSGA 22 NBR-ESD-55 M5-AG

Bellows suction cup (round) with optimal adaptation to uneven surfaces



Size: 22

Suction cup material: Nitrile rubber NBR-ESD

Material hardness [Shore A]: 55 Shore A


Nipple material: Aluminum

Connection: M5-M

Number of folds: 1.5

Vacuum connection: M5-M

Design Data

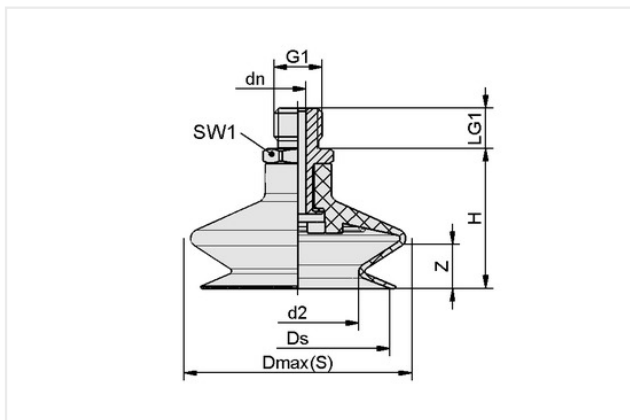

Attribute	Value
d2	11.70 mm
Dmax(S)	25 mm
dn	2.50 mm
Ds	21.50 mm
G1	M5-M
H	24 mm
LG1	5 mm
SW1	7 mm
Z (Stroke)	6 mm

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

Technical Data

Attribute	Value
Suction cup material	Nitrile rubber NBR-ESD
Material hardness [Shore A]	55 Shore A
Size	22
Number of folds	1.50
Connection	M5-AG
Curve radius (min) (convex)	25 mm
Volume	1.40 cm ³

Contact Schmalz

OOO Schmalz | Mozhayskoe highway 165, bldg1, 121596 Moscow, Russia | +7 495 9671248 | post@ruschmalz.ru

Bellows suction cups (round)

FSGA 22 NBR-ESD-55 M5-AG

Part no.:10.01.06.04482

<https://www.schmalz.ru/10.01.06.04482>

Suction force (-600mbar)	5.70 N
Pull-off force	15.20 N
Hose diameter (rec.) d	2 mm
Weight	3.10 g
Product family	FSGA

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface - they do not include a safety factor Pull-off force: The pull-off force of the versions made of natural rubber is reduced by about 40% Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

Spare parts



FGA 22 NBR-ESD-55 N062

Part no.:10.01.06.04454

Size: 22

Suction cup material: Nitrile rubber NBR-ESD

Material hardness [Shore A]: 55 Shore A

Number of folds: 1.5



SA-NIP N062 M5-AG DN250

Part no.:10.01.06.05668

Thread G1: M5-M

Length L1: 15.9 mm

Fitting length: 5 mm

Nominal diameter dn: 2.5 mm

Material: Aluminum