

Flat suction cup (round)

PFYN 50 FPM-65 G1/8-AG

Part no.:10.01.01.00189

<https://www.schmalz.ru/10.01.01.00189>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Flat Suction Cups (Round) > Flat Suction Cups PFYN > PFYN 50 FPM-65 G1/8-AG

Flat suction cup (round) for smooth or slightly rough surfaces



Size: 50

Suction cup material: Fluorocaotchuc FPM


Material hardness [Shore A]: 65 Shore A

Material property: non-marking

Nipple material: Aluminum

Vacuum connection: G1/8"-M

Design Data

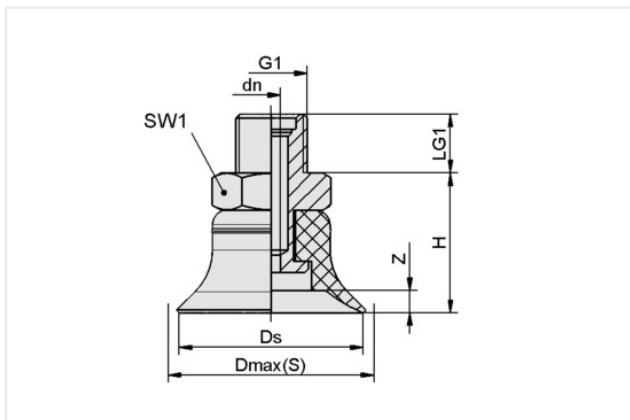

Attribute	Value
dn	2.40 mm
Dmax(S)	53.50 mm
Ds	50 mm
G1	G1/8"-M
H	20 mm
LG1	8 mm
SW1	14 mm
Z (Stroke)	4 mm

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

Technical Data

Attribute	Value
Suction force (-600mbar)	91 N
Volume	7 cm ³
Curve radius (min) (convex)	75 mm
Hose diameter (rec.) d	4 mm
Size	50
Suction cup material	Fluorocaotchuc FPM
Material hardness [Shore A]	65 Shore A

Contact Schmalz

OOO Schmalz | Mozhayskoe highway 165, bldg1, 121596 Moscow, Russia | +7 495 9671248 | post@ruschmalz.ru

Flat suction cup (round)

PFYN 50 FPM-65 G1/8-AG

Part no.:10.01.01.00189

<https://www.schmalz.ru/10.01.01.00189>

Weight 18.40 g

Product family PFYN

Number of folds 0

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface - they do not include a safety factor Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

Accessories



SU 50

Part no.:10.01.01.12837

Size: 50

Clamping range: 45.0 ... 60.0 mm

Temperature resistance: 80 °C

Spare parts



SA-NIP N008 G1/8-AG DN350

Part no.:10.01.01.03532

Thread G1: G1/8"-M

Length L1: 22 mm

Fitting length: 5 mm

Material: Aluminum

Spanner size SW2: 4 mm

Flat suction cup (round)

PFYN 50 FPM-65 G1/8-AG

Part no...:10.01.01.00189

<https://www.schmalz.ru/10.01.01.00189>



PFG 50 FPM-65 N008

Part no...:10.01.01.00077

Size: 50

Suction cup material: Fluorocaotchuc FPM

Material hardness [Shore A]: 65 Shore A

Material property: non-marking