

Flat suction cup (round)

PFYN 95 FPM-65 G1/4-AG

Part no.:10.01.01.00192

<https://www.schmalz.ru/10.01.01.00192>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Flat Suction Cups (Round) > Flat Suction Cups PFYN > PFYN 95 FPM-65 G1/4-AG

Flat suction cup (round) for smooth or slightly rough surfaces



Size: 95

Suction cup material: Fluorocaotchuc FPM


Material hardness [Shore A]: 65 Shore A

Material property: non-marking

Nipple material: Aluminum

Vacuum connection: G1/4"-M

Design Data

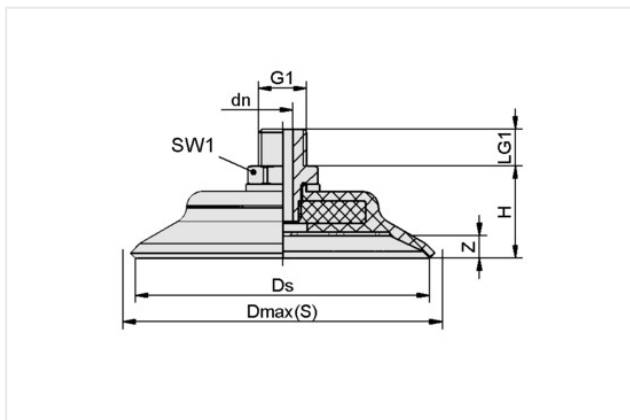

Attribute	Value
dn	5.50 mm
Dmax(S)	102 mm
Ds	95 mm
G1	G1/4"-M
H	25.50 mm
LG1	10 mm
SW1	17 mm
Z (Stroke)	6 mm

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

Technical Data

Attribute	Value
Suction force (-600mbar)	350 N
Volume	35 cm ³
Curve radius (min) (convex)	200 mm
Hose diameter (rec.) d	6 mm
Size	95
Suction cup material	Fluorocaotchuc FPM
Material hardness [Shore A]	65 Shore A

Contact Schmalz

OOO Schmalz | Mozhayskoe highway 165, bdg1, 121596 Moscow, Russia | +7 495 9671248 | post@ruschmalz.ru

Flat suction cup (round)

PFYN 95 FPM-65 G1/4-AG

Part no.:10.01.01.00192

<https://www.schmalz.ru/10.01.01.00192>

Weight 102.20 g

Product family PFYN

Number of folds 0

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface - they do not include a safety factor Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

Accessories



SU 100

Part no.:10.01.01.12840

Size: 100

Clamping range: 100.0 ... 115.0 mm

Temperature resistance: 80 °C

Spare parts



PFG 95 FPM-65 N009 M10x1.25-IG

Part no.:10.01.01.00080

Size: 95

Suction cup material: Fluorocautchuc FPM

Material hardness [Shore A]: 65 Shore A

Material property: non-marking