

## Flat suction cup (round)

SAF 30 NBR-60 M10-AG

Part no.:10.01.01.10713

<https://www.schmalz.ru/10.01.01.10713>

Home > Flat Suction Cups SAF > SAF 30 NBR-60 M10-AG

### Flat suction cup (round) for very dynamic handling of smooth and oily workpieces



Size: 30


Suction cup material: Nitrile rubber NBR

Material hardness [Shore A]: 60 Shore A

Nipple material: Steel

Connection: M10-AG

### Design Data

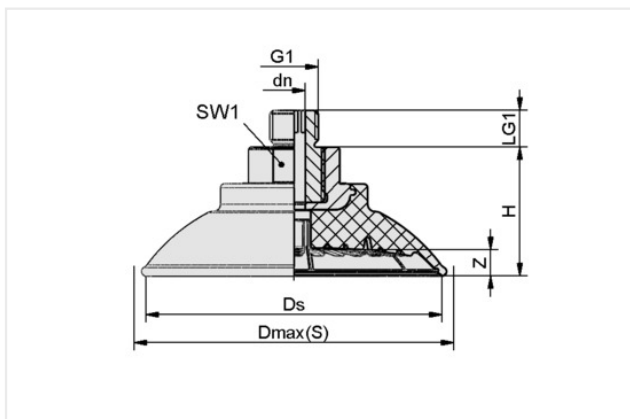

| Attribute  | Value |
|------------|-------|
| dn         | 4 mm  |
| Dmax(S)    | 34 mm |
| Ds         | 31 mm |
| G1         | M10-M |
| H          | 20 mm |
| LG1        | 12 mm |
| SW1        | 17 mm |
| Z (Stroke) | 3 mm  |

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

### Technical Data

| Attribute                    | Value                |
|------------------------------|----------------------|
| Suction force (-600mbar)     | 38 N                 |
| Lateral force                | 30 N                 |
| Lateral force (oily surface) | 28 N                 |
| Volume                       | 2.72 cm <sup>3</sup> |
| Curve radius (min) (convex)  | 40 mm                |
| Hose diameter (rec.) d       | 4 mm                 |
| Size                         | 30                   |
| Suction cup material         | Nitrile rubber NBR   |

### Contact Schmalz

OOO Schmalz | Mozhayskoe highway 165, bldg1, 121596 Moscow, Russia | +7 495 9671248 | [post@ruschmalz.ru](mailto:post@ruschmalz.ru)

## Flat suction cup (round)

SAF 30 NBR-60 M10-AG

Part no...:10.01.01.10713

<https://www.schmalz.ru/10.01.01.10713>

|                             |            |
|-----------------------------|------------|
| Material hardness [Shore A] | 60 Shore A |
| Weight                      | 25.50 g    |
| Number of folds             | 0          |
| Product family              | SAF        |

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface - they do not include a safety factor Lateral force: The specified lateral forces are values measured at a vacuum of -0.6 bar with a dry or oily, smooth, flat workpiece surface. Depending on the workpiece surface and its quality, the actual values may deviate from these values Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

### Accessories



#### SU 30

Part no...:10.01.01.12889

Size: 30

Clamping range: 27.0 ... 35.0 mm

Temperature resistance: 80 °C