

Flat suction cup (round)

PFG 15 VU1-72 N005

Part no...:10.01.01.00555

<https://www.schmalz.ru/10.01.01.00555>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Suction Cups for Handling Sheet Metal > PFG 15 VU1-72 N005

Flat suction cup (round) for smooth or slightly rough surfaces




Size: 15

Suction cup material: Vulkollan VU1

Material hardness [Shore A]: 72 Shore A

Design Data

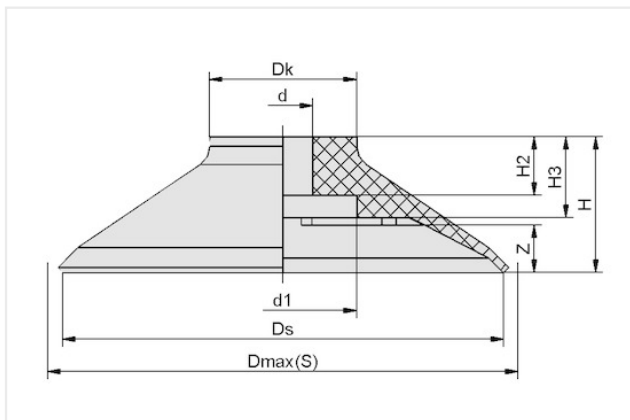

Attribute	Value
d	4.50 mm
d1	8.50 mm
Dk	11.50 mm
Dmax(S)	17 mm
Ds	14.50 mm
H	9.50 mm
H2	2.50 mm
H3	4.50 mm
Z (Stroke)	1.50 mm

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

Technical Data

Attribute	Value
Size	15
Suction cup material	Vulkollan VU1
Suction force (-600mbar)	8.50 N
Volume	0.47 cm ³
Curve radius (min) (convex)	12.50 mm
Material hardness [Shore A]	72 Shore A
Weight	0.70 g

Contact Schmalz

OOO Schmalz | Mozhayskoe highway 165, bldg1, 121596 Moscow, Russia | +7 495 9671248 | post@ruschmalz.ru

Flat suction cup (round)

PFG 15 VU1-72 N005

Part no.:10.01.01.00555

<https://www.schmalz.ru/10.01.01.00555>

Number of folds	0
Product family	PFG

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface - they do not include a safety factor
Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

Accessories



SA-NIP N005 G1/8-AG DN200

Part no.:10.01.01.03529

Nipple family: N 005

Thread G1: G1/8"-M

Length L1: 17.5 mm

Length L: 5 mm

Fitting length: 5 mm

Nominal diameter dn: 2 mm

Material: Aluminum



SA-NIP N005 G1/8-IG DN200

Part no.:10.01.01.03521

Nipple family: N 005

Thread G1: G1/8"-F

Length L1: 20.5 mm

Length L: 16 mm

Fitting length: 16 mm

Nominal diameter dn: 2 mm

Material: Aluminum